



# COC-L60 (12x40)

## LIQUID PHASE COCONUT SHELL BASE CARBON

COC-L60 Granular Activated Carbon (GAC) is manufactured from select grades of coconut shell and features a high-density, large micropore volume and high surface area. It is commonly used for the purification of potable water, beverage manufacture, dialysis, aquarium water and a variety of food grade applications. In properly designed systems, COC-L60 will effectively remove chlorine, chloramines, lead, TCE, PCE, THMs, phenols, pesticides, detergents, taste and odor, and more. COC-L60 meets AWWA Standards, ANSI/NSF Standard 61 and Food Chemicals Codex Standards for drinking water applications.





### TYPICAL PHYSICAL PROPERTIES | SPECIFICATIONS

CTC No. Min. (ASTM D3467)	60
Iodine Number, min. (ASTM D4607)	1100 - 1200
Apparent Density (ASTM D-2854), gm/cc	0.48 – 0.50
Hardness, Min. (ASTM D-3802)	95
Ash, Max (ASTM D-2866)	3%
Moisture, Max. (ASTM D-2867)	2%
U.S. Standard Sieve Size	12 x 40
Larger than No. 12, max.	5%
Smaller than No. 40, max	4%



### APPLICATIONS

Used for the purification of potable water, aquarium water, beverage manufacture, dialysis, and a variety of food grade applications

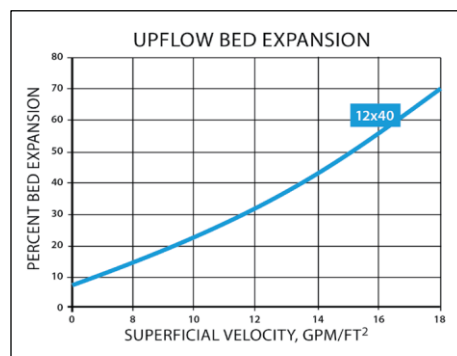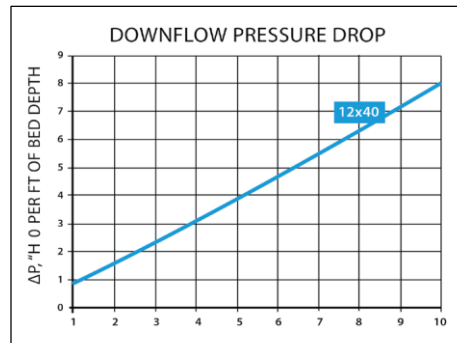

### STANDARD PACKAGING

- 55 lb or 27.5 lb polylined polypropylene bags
- 200 lb fiber drums
- 1100 lb supersacks

This information is offered solely for your consideration and verification. It has been gathered from reference materials and/or test procedures and is believed to be true and accurate. None of this information shall be constituting a warranty or representation, expressed or implied, for which we assume legal responsibility or that the information or goods described is fit for any particular use either alone or in combination with other goods or processes.

