



PENTEK® RO Membrane

Housing



Membrane
Housing
with 90°
Outlet

The **PENTEK RO Membrane Housing** is manufactured from a high-quality polypropylene.

This component will accommodate most standard 12" membrane elements.

Both the ribbed cap and the housing are one-piece injection molded parts, requiring no solvents or glues to be used in the manufacturing process. The ribbed cap incorporates acme square threads and two o-rings to ensure a leak-proof seal.

The **RO Membrane Housings** have a straight inlet and are equipped with (2) 90° outlets. The 90° outlets eliminate the need for additional elbows. All ports have standard 1/8" NPT threads.

Product Features

- Manufactured from polypropylene
- Accommodates most 12" membrane elements
- 90° angle outlet




PENTEK® RO Membrane

Housing



Membrane
Housing with
90° Outlet

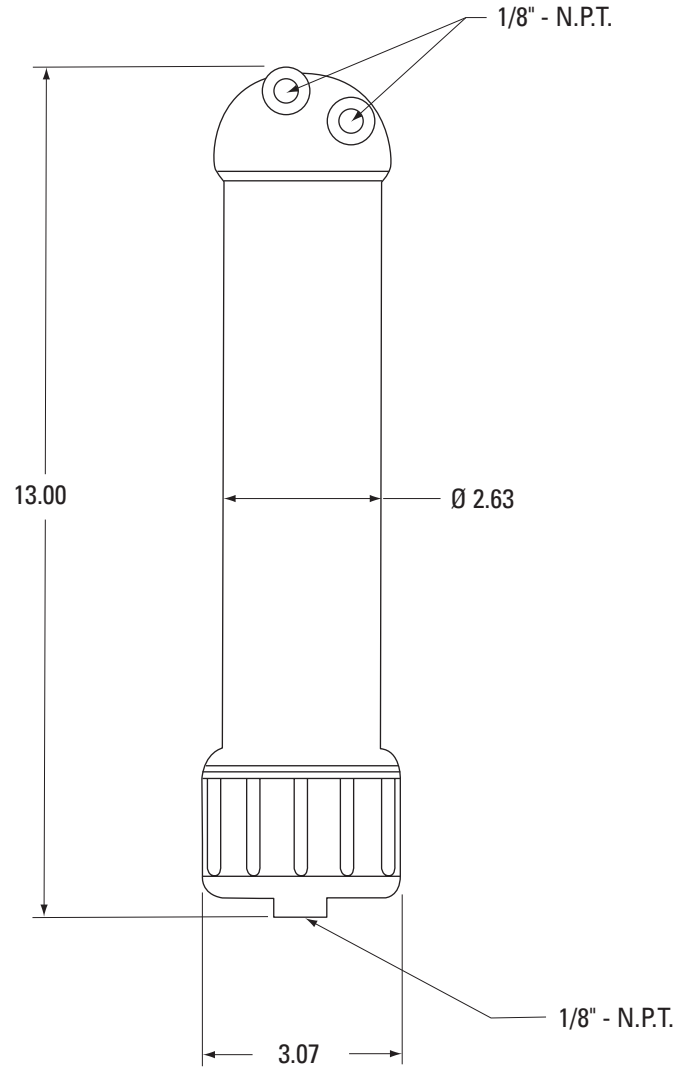

Materials of Construction

Housing	Reinforced Polypropylene
Cap	Reinforced Polypropylene
O-Ring	EPDM (SH143483)
Maximum Temperature	125°F (51.7°C)
Maximum Pressure	125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.



Pentair Residential Filtration, LLC
5730 North Glen Park Road
Milwaukee, WI 53209
Tel: 262.238.4400
Fax: 262.238.4404
www.pentairaqua.com/pro
Customer Care: 800.279.9404